


DATASHEET REV. 001/A UPDATED 10/07/2018

Pag. 3 of 4

CATEGORY COURTESY LIGHT



GENERAL FEATURES	MATERIALS					
IP Protection grade	IP65	BEZEL	AISI 316 STAIN	NLESS STEEL		
Installation on	WALL	BODY	ALUMINIUM	ALUMINIUM		
Molding	Ø 44 mm	DIFFUSER	POLYCARBONATE			
Recess	3 mm	BEZEL FINISHING	BEZEL FINISHING AISI 316L STAINLESS STEEL / WHITE 9010 / SATIN			
Mounting hole	Ø 25 mm					
Weight	85 gr					
Fixing system	SCREWS					
Orientable	No					
Flexible	No					
Switch	No					
ELECTRICAL SPECIFICA	ATIONS					
TYPE OF POWER Constant Voltage						
Light source 1 POWER LED						
Light Type	ight Type One Color					
Power supply 10-30 Vdc						
Power consumption 1.5 W						
Absorption 0,12A@12V / 0,06A@24V						
Dimmable / Recomm	nended dimmer	No			PWM	
PHOTOMETRIC DATA						
Color Temperature		WARM WHIT	ГЕ	DAY LIGHT	COOL WHITE	
		(2900-310	00 °K)	(3800-4100 °K)	(5500-6000 °K)	
CRI		90		80		
Luminous flux						
Luminous efficacy	w					
	Ø at 1 m Ø at 2 m					
	Ø at 3 m					
ANGLE						
CERTIFICATIONS $\stackrel{F}{\overline{\smile}}$ $\stackrel{\frown}{\overline{\smile}}$ $\stackrel{\frown}{\overline{\smile}}$ $\stackrel{\frown}{\overline{\smile}}$ Rohs						

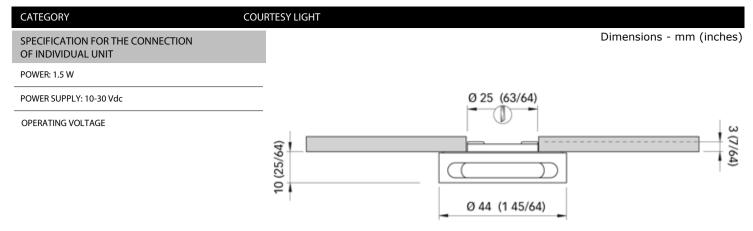


## **CONNECTION INFORMATIONS**

WARNINGS


Use the unit in ultra-low voltage (SELV) . Do not plug the unit directly into the wall socket (AC).

## GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE

This product can be connected in parallel

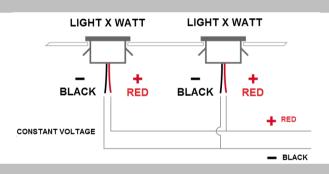

## **INSTRUCTIONS FOR ASSEMBLY**

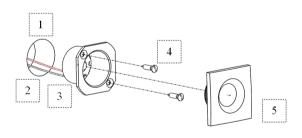

- 1. Make the hole for the corresponding product, according to the size recommended in the scheme.
- 2. The wires coming from the power supply (at the voltage provided for by the chart) must be present in the panel where the light will be installed.
- 3. The spot light is equipped with fast-on male connectors on the wires. Cut the wires to remove the fast-on connectors when the application does not require them.

Connection: the positive is the red wire, the negative is the black wire; test the product's functioning.

- 4. Secure the spot light to the panel using self-tapping screws.
- 5. Install the frame on the spot light by applying pressure.