




GINEICO

6022 Hydra Low Glare Recessed Spotlight SMD LED

102,5 LUMEN

57 Lux ad 1 m

77° ANGLE

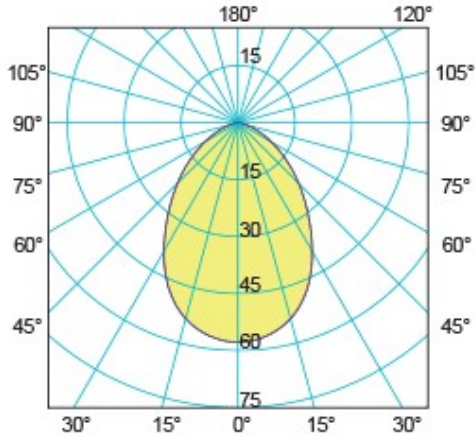

distance (m)	cone diameter (m)	illuminance (lx)
0.5	0.80 0.80	230
1.0	1.61 1.60	57
1.5	2.41 2.39	26
2.0	3.22 3.19	14
2.5	4.09 3.99	9
3.0	4.82 4.79	6


— CO - C180 Half-Angle Value: 77.2°

Power LED

180 LUMEN

99 Lux ad 1 m

81° ANGLE

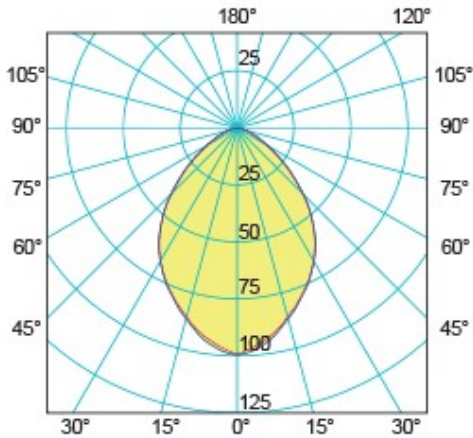

distance (m)	cone diameter (m)	illuminance (lx)
0.5	0.86 0.85	396
1.0	1.71 1.71	99
1.5	2.57 2.56	44
2.0	3.43 3.42	22
2.5	4.29 4.27	16
3.0	5.14 5.12	11

— CO - C180 Half-Angle Value: 81.0°
— C90 - C270 Half-Angle Value: 81.2°



G45, 76-84 WATERWAY DRIVE COOMERA, QUEENSLAND, 4209, AUSTRALIA

PHONE: (+61) 7 5556 0244

EMAIL: SALES@GINEICOMARINE.COM.AU

WWW.GINEICOMARINE.COM.AU