


Faretti fissi da incasso per illuminazione indiretta a soffitto o segnapasso, con cornice tonda 30mm o 50mm. Parte interna: laccata bianca con cornice bianca, laccata nera con cornice in altre finiture. Su richiesta top rivestito in pelle o tessuto.  
**Materiale:** Corpo in ottone, dissipatore in alluminio • **Installazione:** Molle a filo, molle a nastro per la versione piccola. • **Accessori:** Drivers pag. 320-323. Cassaforma pag. 324-325.


*Fixed downlight ideal for ceiling or path indirect lighting, with round frame 30mm or 50mm. Inside part: white lacquered with white frame, black lacquered with other frame finishes. On request, the top can be covered with leather or fabric.*

**Material:** Brass body, aluminium heatsink. • **Installation:** Wire springs, band springs for small version. • **Accessories:** Drivers pag. 320-323. Mounting box pag. 324-325.


- 20
- 23
- 3
- 11
- 10
- 9
- 39
- 8
- 44
- 19
- 49
- 6
- 38
- 7
- 37
- 15
- 45



KIDD - 30		LED COLOUR			ALIMENT./POWER SUPPLY	IP
3395/U3W-30 1 x max 3W	STD	3000°K	ampio/wide		500mA	IP65
	OPT	6000°K -  2700°K -  -				



KIDD - 50		LED COLOUR			ALIMENT./POWER SUPPLY	IP
3395/R4W-50 1 x max 4W	STD	3000°K	ampio/wide		350mA	
	OPT	6000°K -  2700°K -  -				IP65

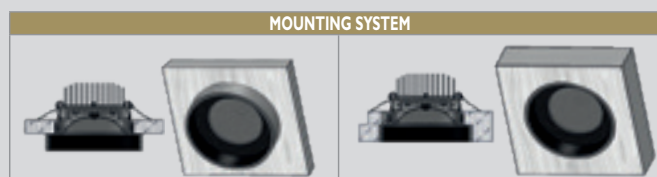



kidd - 30




kidd - 50


Faretto fisso da incasso per illuminazione indiretta a soffitto, con cornice tonda 70mm, 90mm, 110mm. Parte interna: laccata bianca con cornice bianca, laccata nera con cornice in altre finiture. Su richiesta top rivestito in pelle o tessuto. **Materiale:** Corpo ottone, dissipatore in alluminio • **Installazione:** Molle a filo. • **Accessori:** Drivers pag. 320-323. Cassaforma pag. 324-325.

*Fixed downlight ideal for ceiling lighting, with round frame 70mm, 90mm, 110mm. Inside part: white lacquered with white frame, black lacquered with other frame finishes. On request, the top can be covered with leather or fabric. **Material:** Brass body, aluminium heatsink. • **Installation:** Wire springs. • **Accessories:** Drivers pag. 320-323. Mounting box pag. 324-325.*


- 20
- 23
- 3
- 11
- 10
- 9
- 39
- 8
- 44
- 19
- 49
- 6
- 38
- 7
- 37
- 15
- 45



KIDD - 70		LED COLOUR			ALIMENT./POWER SUPPLY	IP	VARIE/MORE
3395/R8W-70 1 x max 8W	STD	3000°K	ampio/wide		500mA		
	OPT	6000°K -  2700°K -				IP65	
3395/K8W-70 1 x max 8W	STD	3000°K	ampio/wide		16-32Vdc		
	OPT	6000°K -  2700°K				IP65	

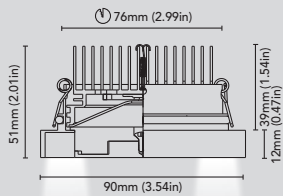

KIDD - 90		LED COLOUR			ALIMENT./POWER SUPPLY	IP	VARIE/MORE
3395/R12W-90 1 x max 12W	STD	3000°K	ampio/wide		500-700mA		
	OPT	6000°K -  2700°K -				IP65	
3395/K12W-90 1 x max 12W	STD	3000°K	ampio/wide		16-32Vdc		
	OPT	6000°K -  2700°K				IP65	

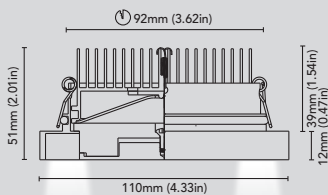

KIDD - 110		LED COLOUR			ALIMENT./POWER SUPPLY	IP	VARIE/MORE
3395/R12W-110 1 x max 12W	STD	3000°K	ampio/wide		500-700mA		
	OPT	6000°K -  2700°K -				IP65	
3395/K12W-110 1 x max 12W	STD	3000°K	ampio/wide		16-32Vdc		
	OPT	6000°K -  2700°K				IP65	



kidd - 70, 90, 110