




# GINEICO

*bcm*  
BENEDETTI LIGHTING



ORLANDO A60  
3406/K1.5W-A60




## ELECTRICAL PROPERTIES

		
POWER	1,5W	
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)	
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	
DIMMABLE	YES	
LIGHT SOURCE	OSRAM POWER LED	
LED COLOUR	3000K, RED	


## MECHANICAL PROPERTIES

	
IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	140 lm		
LIGHTNESS 1mt	65 lx		
LIGHTNESS 2mt	16 lx		
LIGHTNESS 3mt	7 lx		

### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

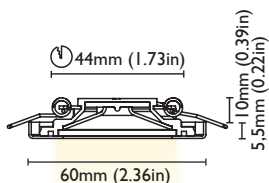

CUT OUT	44 mm (1.73in)
FRAME	60 mm (2.36in)
DEPTH	10 mm (0.39in)
REFLECTOR ADJUSTABILITY	NO



G45, 76-84 WATERWAY DRIVE COOMERA, QUEENSLAND, 4209, AUSTRALIA.

PHONE: (+61) 7 5556 0244

EMAIL: SALES@GINEICO.COM

WWW.GINEICOMARINE.COM.AU

# GINEICO

*bcm*  
BENEDETTI LIGHTING  
**ORLANDO A75**  
**3406/K2W-A75**



## ELECTRICAL PROPERTIES




POWER	2W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED

## MECHANICAL PROPERTIES




IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	240 lm		
LIGHTNESS 1mt	111 lx		
LIGHTNESS 2mt	28 lx		
LIGHTNESS 3mt	12 lx		



FINISHES	
	POLISHED S.STEEL
	BRUSHED S.STEEL
	WHITE S.STEEL

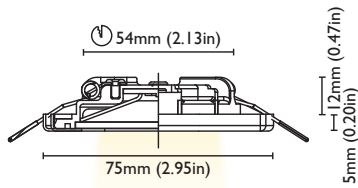

CUT OUT	54 mm (2.13in)
FRAME	75 mm (2.95in)
DEPTH	12 mm (0.47in)
REFLECTOR ADJUSTABILITY	NO



# GINEICO




*bcm*  
BENEDETTI LIGHTING

ORLANDO A85



3406/K4W-A85




## ELECTRICAL PROPERTIES

		
POWER	4W	
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)	
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	
DIMMABLE	YES	
LIGHT SOURCE	OSRAM POWER LED	
LED COLOUR	3000K, 3000K+RED	


## MECHANICAL PROPERTIES

	
IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	460 lm		
LIGHTNESS 1mt	212 lx		
LIGHTNESS 2mt	53 lx		
LIGHTNESS 3mt	24 lx		

### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

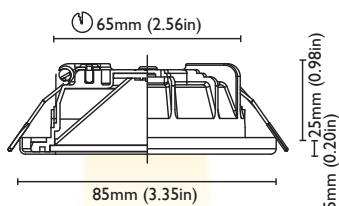

CUT OUT	65 mm (2.56in)
FRAME	85 mm (3.35in)
DEPTH	25 mm (0.98in)
REFLECTOR ADJUSTABILITY	NO



G45, 76-84 WATERWAY DRIVE COOMERA, QUEENSLAND, 4209, AUSTRALIA.

PHONE: (+61) 7 5556 0244

EMAIL: SALES@GINEICO.COM

WWW.GINEICOMARINE.COM.AU

# GINEICO

*bcm*  
BENEDETTI LIGHTING

**ORLANDO A95**  
**3406/K6W-A95**



## ELECTRICAL PROPERTIES

POWER	6W
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
LIGHT SOURCE	OSRAM POWER LED
LED COLOUR	3000K, 3000K+RED


## MECHANICAL PROPERTIES

IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	610 lm		
LIGHTNESS 1mt	282 lx		
LIGHTNESS 2mt	70 lx		
LIGHTNESS 3mt	31 lx		

### FINISHES

POLISHED S.STEEL  
BRUSHED S.STEEL  
WHITE S.STEEL

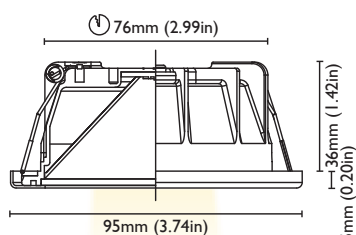

CUT OUT	76 mm (2.99in)
FRAME	95 mm (3.74in)
DEPTH	36 mm (1.42in)
REFLECTOR ADJUSTABILITY	NO

