





ocean


. 105




. 130

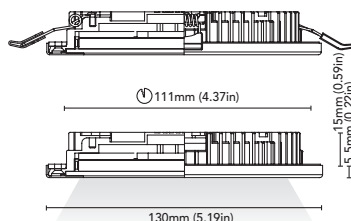


. 155

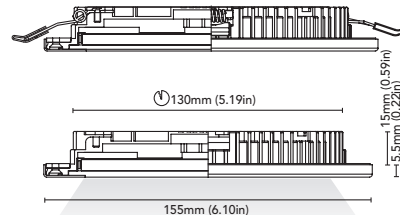


CODE	3479-105A-K8W 3479-105C-K8W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 8W
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 242lm 1mt 82lx 2mt 21lx 3mt 9lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL LED COLOUR	2700K - 4000K
IP RATE	



CODE	3479-130A-K10W 3479-130C-K10W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 10W
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 398lm 1mt 134lx 2mt 34lx 3mt 15lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL LED COLOUR	2700K - 4000K
IP RATE	



CODE	3479-155A-K12W 3479-155C-K12W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 12W
SUPPLY	16-32 Vdc - DRIVER ON BOARD
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 492lm 1mt 167lx 2mt 42lx 3mt 19lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL LED COLOUR	2700K - 4000K
IP RATE	




FINISHES



* On request, frame 9000-RING.

210

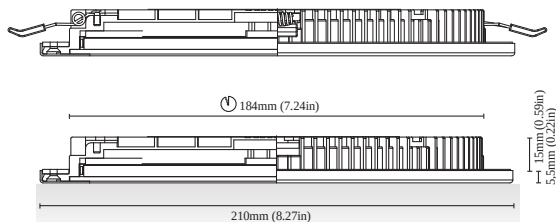

3479-210A-K18W

3479-210C-K18W

FIXED CEILING LAMP

NO

POWER LED

1 x MAX 18W

16-32 Vdc - DRIVER ON BOARD

POLARITY REVERSE

YES

WIDE

OPAL

3000K

CRI >80


LMN 865lm

1mt 290lx

2mt 73lx

3mt 32lx

IP66



BODY: STAINLESS STEEL AISI 316
HEATSINK: SPECIAL COMPOUND

(A) STAINLESS STEEL SPRINGS
(C) SCREWS

2700K - 4000K



ocean - 105, 130, 155, 210


GINEICO