



GINEICO

AUDREY NS 1,5W

DATASHEET REV.	001/A
UPDATED	21/12/2017

Pag. 3 of 4

CATEGORY

READING LIGHT



MATERIAL	FINISHING	LIGHT TEMP.	ITEM COD
ALUMINIUM	CROMED WHITE LEATHER	DL	
ALUMINIUM	CROMED	DL	
ALUMINIUM	CROMED BLACK LEATHER	DL	

GENERAL FEATURES

MATERIALS

IP Protection grade

IP40

BASE

AISI 316 STAINLESS STEEL

Installation on

TABLE

HEAD

AISI 316 STAINLESS STEEL

Molding

300 x 50 mm

Recess

Mounting hole

Weight

Fixing system

SCREWS

Orientable

No

Flexible

Yes

Switch

No

ELECTRICAL SPECIFICATIONS

TYPE OF POWER

Constant Voltage

Light source

1 POWER LED

Light Type

One Color

Power supply

10-30 Vdc

Power consumption

1.5 W

Absorption

0.06 A

Dimmable / Recommended dimmer

No

PHOTOMETRIC DATA

Color Temperature

WARM WHITE
(2900-3100 °K)

DAY LIGHT
(3800-4100 °K)

COOL WHITE
(5500-6000 °K)

CRI

Luminous flux

Luminous efficacy

Ø at 1 m

Ø at 2 m

Ø at 3 m

ANGLE

CERTIFICATIONS



CATEGORY

READING LIGHT


SPECIFICATION FOR THE CONNECTION OF INDIVIDUAL UNIT

POWER: 1.5 W

POWER SUPPLY: 10-30 Vdc

OPERATING VOLTAGE

Dimensions - mm (inches)

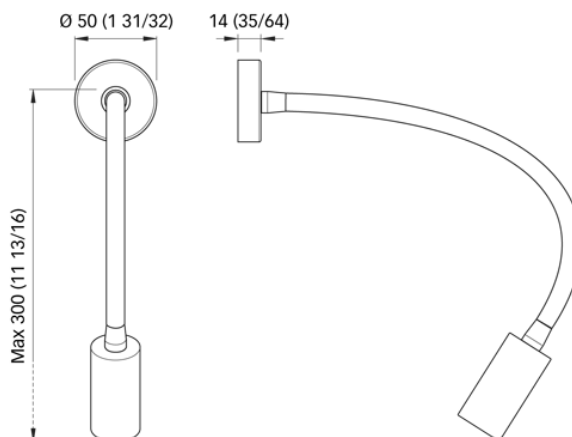


CONNECTION INFORMATION

WARNINGS


Use the unit in ultra-low voltage (SELV) .
Do not plug the unit directly into the wall socket (AC).

GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE

This product can be connected in parallel

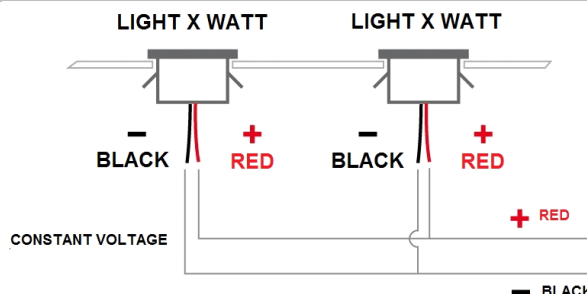

INSTRUCTIONS FOR ASSEMBLY

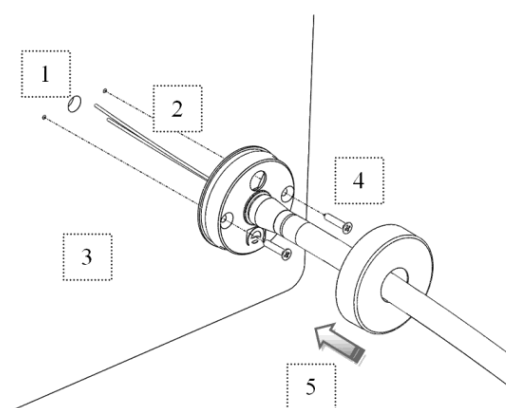

1. Drill a $\varnothing 5\text{mm}$ hole on the panel to allow the passage of the power wires by the central hole on the base of the reading light.
2. Connect the wires: the positive with the red, the negative with the black and test the product's functioning.
3. Lay the reading light on the surface, above the hole made for the wires.
4. Fix the base by means of two self-tapping screws.
5. Install the product's frame by applying pressure