

GINEICO



Tolomeo


Art. 8460

 Gruppo di rischio Fotobiologico EN 62471
Photobiological risk group EN 62471
Groupe de risque photobiologique EN

IP20



CE



Luminaire customizable with light sources of your choice and positioned as desired



G45, 76-84 WATERWAY DRIVE COOMERA, QUEENSLAND, 4209, AUSTRALIA

PHONE: (+61) 7 5556 0244


EMAIL: SALES@GINEICO.COM

WWW.GINEICOLIGHTING.COM.AU


GINEICO

Fissaggio / Fixing / Fixation

1.
Inassato
Recessed
Encastré



2.
Senza incasso
Surface mounted
Monté en surface



COMPONENTI / COMPONENTS / COMPONENTS

Canalina di alluminio / Aluminium channel / Canal en aluminium



CAN.8460

Lunghezza canalina personalizzabile Max.2Mt / Customizable channel length Max.2Mt / Longueur de canal personnalisable Max.2Mt



Fornito con viti autofilettanti con esagono incassato, in acciaio AISI 316L / Supplied with AISI 316L stainless screws / Fourni avec en Inox AISI 316L

Faretti / Spotlights / Spot






Power Led

10/30 VDC
3 W
Dimmer 6018

FAR.F.8460.2700.9
FAR.F.8460.3200.9
FAR.F.8460.4000.9
FAR.F.8460.R

Lente / Lens / Lentille
31°

CRI>90 | Indice di resa cromatica
Color rendering index
Indice de rendu des couleurs

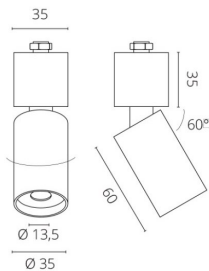




Power Led

10/30 VDC
3 W
Dimmer 6018

FAR.O.8460.2700.9
FAR.O.8460.3200.9
FAR.O.8460.4000.9
FAR.O.8460.R

Lente / Lens / Lentille
31°

CRI>90 | Indice di resa cromatica
Color rendering index
Indice de rendu des couleurs



Power Led

10/30 VDC
3 W
Dimmer 6018

FAR.FQ.8460.2700.9
FAR.FQ.8460.3200.9
FAR.FQ.8460.4000.9
FAR.FQ.8460.R

Lente / Lens / Lentille
31°

CRI>90 | Indice di resa cromatica
Color rendering index
Indice de rendu des couleurs




G45, 76-84 WATERWAY DRIVE COOMERA, QUEENSLAND, 4209, AUSTRALIA

PHONE: (+61) 7 5556 0244

EMAIL: SALES@GINEICO.COM

WWW.GINEICOLIGHTING.COM.AU

Strip

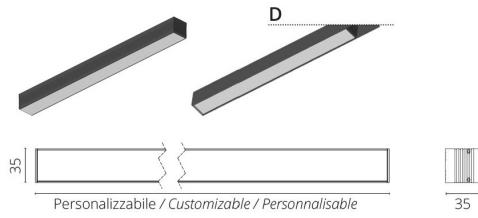

LED

24/27 VDC
19,5 W/m
Dimmer 6018


STRIP.Q.8460.2700

STRIP.Q.8460.3200

STRIP.Q.8460.4000

Cover

O
Opal

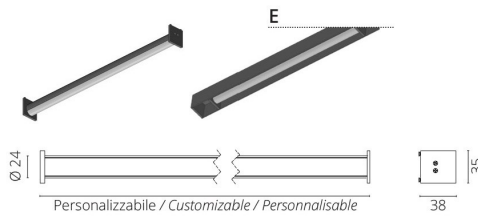

LED

24/27 VDC
13 W/m
Dimmer 6018

STRIP.T.8460.2700


STRIP.T.8460.3200

STRIP.T.8460.4000

Cover

O
Opal

Global

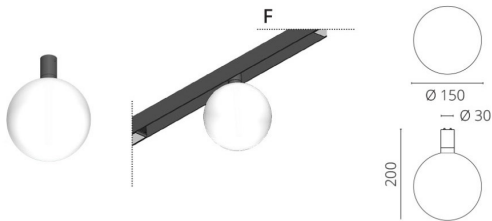

LED

24/27 VDC
4,5 W
Dimmer 6018

SFE.OP.8460.2700

SFE.OP.8460.3200

SFE.OP.8460.4000

Glas

O
Opal

