




# GINEICO

## GLADIS 1L 1W

CATEGORY

COURTESY LIGHT



GENERAL FEATURES

MATERIALS

IP Protection grade	IP65	BEZEL	AISI 316 STAINLESS STEEL
Installation on	WALL	BODY	ALUMINIUM
Molding	43 x 43 mm	DIFFUSER	POLYCARBONATE
Recess	3 mm	BEZEL FINISHING	AISI 316L STAINLESS STEEL / WHITE 9010 / SATIN
Mounting hole	Ø 25 mm		
Weight	85 gr		
Fixing system	SCREWS		
Orientable	No		
Flexible	No		
Switch	No		

ELECTRICAL SPECIFICATIONS

TYPE OF POWER	Constant Voltage
Light source	1 POWER LED
Light Type	One Color
Power supply	10-30 Vdc
Power consumption	1.5 W
Absorption	0,12A@12V / 0,06A@24V
Dimmable / Recommended dimmer	No

PHOTOMETRIC DATA

Color Temperature	WARM WHITE (2900-3100 °K)	DAY LIGHT (3800-4100 °K)	COOL WHITE (5500-6000 °K)
CRI	90	80	
Luminous flux			
Luminous efficacy			
Ø at 1 m			
Ø at 2 m			
Ø at 3 m			
ANGLE			

CERTIFICATIONS



CATEGORY

COURTESY LIGHT


SPECIFICATION FOR THE CONNECTION OF INDIVIDUAL UNIT

Dimensions - mm (inches)

POWER: 1.5 W

POWER SUPPLY: 10-30 Vdc

OPERATING VOLTAGE

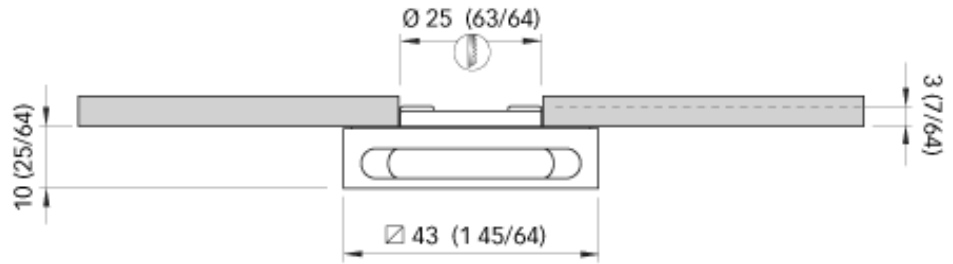


## CONNECTION INFORMATION

### WARNINGS


Use the unit in ultra-low voltage (SELV) .  
Do not plug the unit directly into the wall socket (AC).

## GENERAL INFORMATION TO CONNECT MORE THAN ONE DEVICE

This product can be connected in parallel

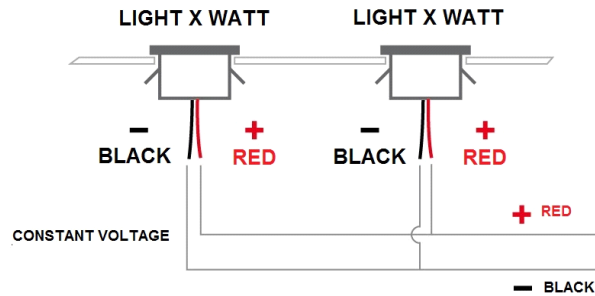

## INSTRUCTIONS FOR ASSEMBLY

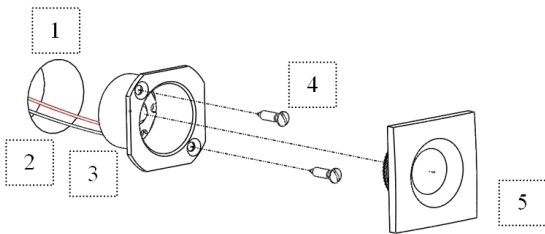

1. Make the hole for the corresponding product, according to the size recommended in the scheme.
2. The wires coming from the power supply (at the voltage provided for by the chart) must be present in the panel where the light will be installed.
3. The spot light is equipped with fast-on male connectors on the wires. Cut the wires to remove the fast-on connectors when the application does not require them.  
Connection: the positive is the red wire, the negative is the black wire; test the product's functioning.
4. Secure the spot light to the panel using self-tapping screws.
5. Install the frame on the spot light by applying pressure.