



Volans

The Volans range of adjustable spotlights is an important group of products within our lighting range.

The surface mounted design of the fittings combined with the ability to adjust the direction of output make them perfect luminaires in an anti-glare lighting plan. No recess depth is required to fit the products which also means that they can be installed in areas where there is no space above headlinings or ceiling panels.

The Volans fitting is not only suitable for use as a spotlight but can also double up as a reading light, the narrow lens angle of 13° being ideal for this use as it offers a focused and powerful output.


As standard the fitting is supplied in a chrome plated finish. The item is photographed here in a galvanised brushed brass finish which is available on request and may be subject to a minimum order quantity.

- Adjustable surface mounted spotlight
- Chrome plated finish standard (brush galvanised brass photographed- special order)
- Dimmable
- Manufacturer Foresti & Suardi
- Installation Surface Mounted
- Light Element Type Power LED
- Input Voltage 10-30Vdc
- IP Rating IP20
- Finish Chrome




Volans 40 Adjustable

Weight (kg) 0.34
 Rotation Angle 30°
 Lens Angle 13°
 Lux Level at 1 Metre 1242.00
 Lumens 101.00
 Lumens Per Watt (Lm) 50.50
 Wattage 2W
 CRI 80.00

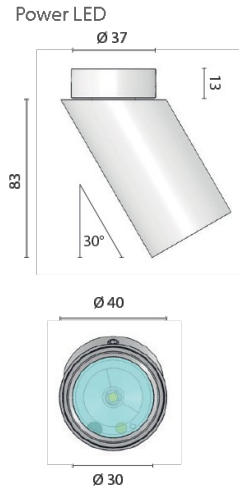


Volans 40P Adjustable

Weight (kg) 0.25
 Rotation Angle 30°
 Lens Angle 13°
 Lux Level at 1 Metre 1242.00
 Lumens 101.00
 Lumens Per Watt (Lm) 50.50
 Wattage 2W
 CRI 80.00

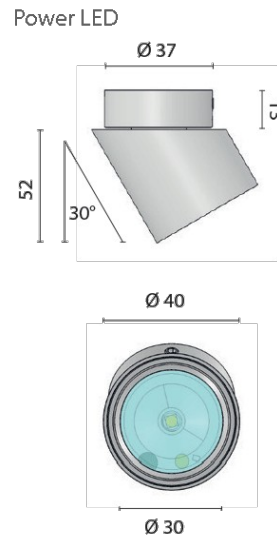


Volans 40 Twist

Length (mm) 88.00
 Weight (kg) 0.40
 Rotation Angle 270°
 Lens Angle 13°
 Lux Level at 1 Metre 1242.00
 Lumens 101.00
 Wattage 2W

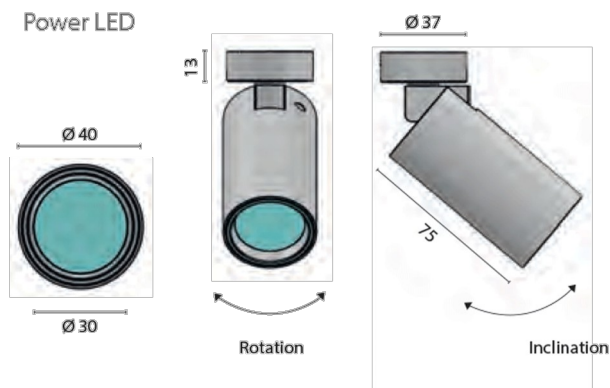

Volans 40P Twist

Length (mm) 88.00
 Weight (kg) 0.35
 Rotation Angle 270°
 Lens Angle 13°
 Lux Level at 1 Metre 1242.00
 Lumens 101.00
 Wattage 2W

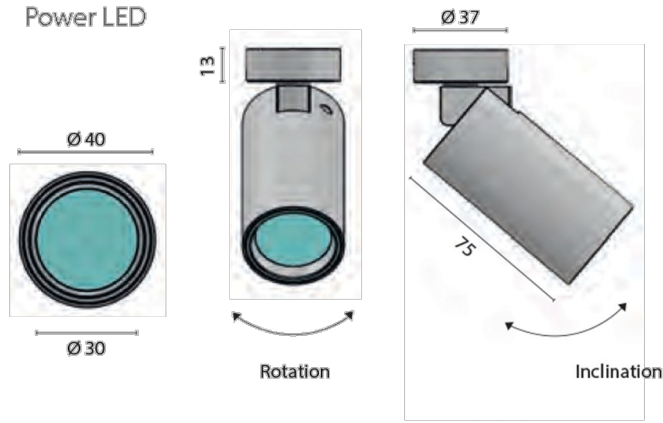

Volans 70 Adjustable

Height (mm) 124.50
 Weight (kg) 0.85
 Lens Angle 56°
 Lux Level at 1 Metre 339.00
 Lumens 366.00
 Lumens Per Watt (Lm) 73.20
 Wattage 5W
 CRI 90.00
 Bezel Size (mm) Ø70.00
 Fixing Dimensions Ø60.00mm

