



1

PALO

SUN AWNING POLES

Featuring high-tech carbon fiber construction and fantastic matt finishing, **GINEICO**'s sun awning poles come in a variety of lengths and diameters to perfectly match your stern or bow deck.

Designed for use on small to medium motor and sailing yachts, these poles are extremely light-weight, easy to set up, and stow anywhere with wall clips.

MATERIAL



CUSTOM
COLOR



LENGTH 20 to 230 cm

MAX LOAD

PALO	32	32 Kg to 55 Kg
PALO	38	44 Kg to 79 Kg
PALO	60	100 Kg to 210 Kg
PALO	80	260 Kg to 550 Kg

DIAMETER 32, 38, 60, 80 mm

ANGLE 0° or 6°

CONNECTION eye-bolt or Clamcleat®



STRONG, CONVENIENT & AESTHETICALLY IMPECCABLE

Carbon fiber strength makes these poles stable support for your sun awning. No vibrations means a quieter boating experience at anchor, but also during slow navigation with no wind. Their simple elegance adds value to any boat.

- Determine the max load you will apply to the poles adding the wind effect on the awning, and check on the next page which one is the right pole for you, choosing from 22 lengths (from 20 cm to 230 cm), four diameters (32 mm, 38 mm, 60 mm, 80 mm), and two angles (0° or 6°).
- Choose the suitable socket for your own yacht. With angled sockets you can follow the lines of your boat superstructure or create a greater shade area at shoulder height, while keeping a small perimeter on deck.
- Select how to attach your awning: a simple eye-bolt on top, if the tape has adjustable length or with a Clamcleat® on the side with external or internal rope.

CUSTOMIZE YOUR SHADE


Helios poles come in carbon look, or a custom color of your choice. We also provide awnings made of Soltis Serge Ferrari® fabrics, in different colors.

EASY TO SET-UP & STOW


Set up the extra-light poles by sliding them into the Delrin lined sockets.

Friction keeps them in place when the sun awning is tightened. Release the awning and effortlessly slide the poles out. Just as quickly hang them against any bulkhead or below the locker lid with our stainless steel spring clips.

CLAMCLEAT SYSTEMS AVAILABLE

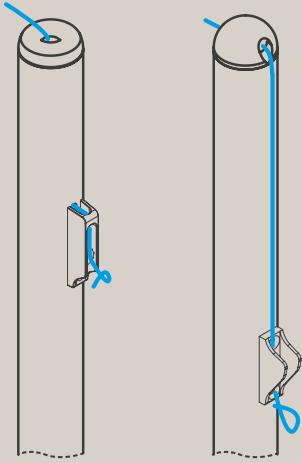

EYE-BOLT VERSION

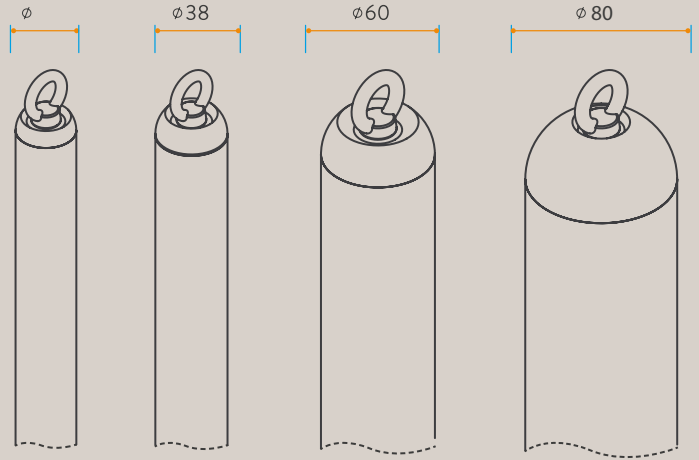

- Select how to attach your awning: a simple eye-bolt on top, if the tape has adjustable length or with a Clamcleat® on the side with external or internal rope.

PALO 32

PALO 38


PALO 60

PALO 80

MAX LOAD ON TOP OF THE POLE

	32	38	60	80
110 cm	55 Kg	79 Kg	210 Kg	550 Kg
120 cm	50 Kg	73 Kg	193 Kg	500 Kg
130 cm	46 Kg	67 Kg	178 Kg	460 Kg
140 cm	43 Kg	63 Kg	164 Kg	430 Kg
150 cm	40 Kg	58 Kg	154 Kg	400 Kg
160 cm	38 Kg	55 Kg	144 Kg	375 Kg
170 cm	36 Kg	52 Kg	136 Kg	350 Kg
180 cm	34 Kg	49 Kg	128 Kg	330 Kg
190 cm	32 Kg	46 Kg	121 Kg	315 Kg
200 cm		44 Kg	115 Kg	300 Kg
210 cm			110 Kg	285 Kg
220 cm			105 Kg	270 Kg
230 cm			100 Kg	260 Kg


3

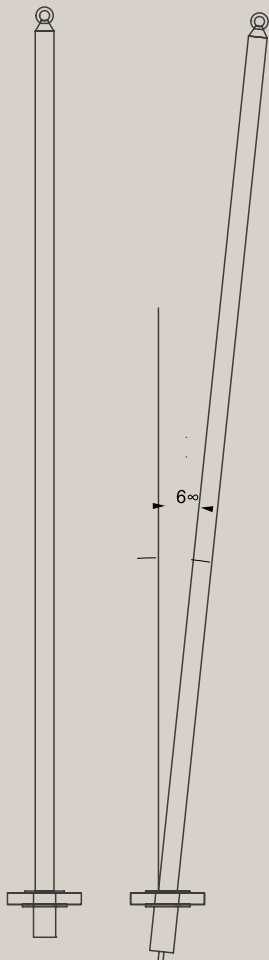




FEMALE DECK SOCKETS


Stainless steel female deck socket with Delrin sleeve for 32 and 38 mm (1.25" and 1.50") poles

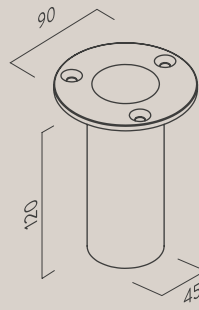

6° angled stainless steel female deck socket with Delrin sleeve for 32 and 38 mm (1.25" and 1.50") poles

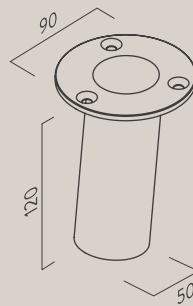

Stainless steel female deck socket with Delrin sleeve for 60 mm (2.36") pole. Also available with 6° angle.

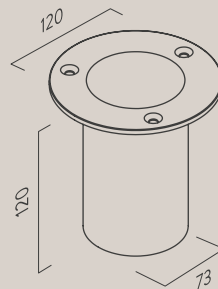

All sockets can come with optional counter-flange for fastening, drain tube, or bottom M10 stud bolt

